

INSTALLATION
INSTRUCTIONS

1 x LUMO
IP65 FLEXIBLE
STRIP LIGHT



CODE: SE30115C0/W0 - SE30025C0/W0

IMPORTANT: Please read these instructions before commencing installation and retain for future reference.

Components


Tools required



1 x IP65 Flexible Strip Light



1 x instructions

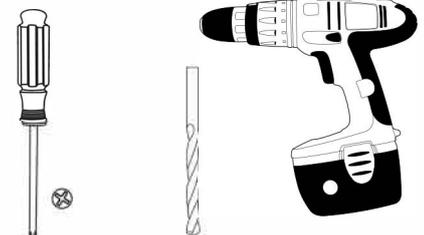

Screw Driver

9-11mm
Drill bit

Power Drill

Important Safety Information

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for future reference.

We recommend that you consult a qualified electrician. All electrical installation must be carried out in accordance with current IEE wiring regulations (BS7671).

These products must not be modified, if any modification are made, it may invalidate the warranty and may render the product unsafe. These LED lights operate low voltage (24V)

Do not wire the individual LED light fittings directly to the mains.

- If in doubt installation must be carried out by a qualified electrician.
- Install on smooth flat surface(s) only.
- Do not exceed or stretch the cable length of each LED wire.
- This product is IP65 Rated.
- The wattages are as follows:
1m = 2.5w
2m = 5w
- Use the SE40560 IP44 Driver with this product, sold separately. The maximum wattage of this driver is 15W. Do not exceed the maximum wattage.

Safety Instructions

1. Before commencing installation or maintenance, isolate the main electrical supply for the appropriate circuit at the fuse board.
2. This product is only suitable for connecting to an appropriate driver.
3. Never exceed the total output of the LED driver.
4. The lights should be mounted onto a secure surface.
5. Suitable for furniture lighting.
6. When the lamp expires the fitting must be replaced


Waste Electrical & Electronic Equipment (WEEE)

The symbol on the product, or on the document accompanying the product, the crossed out wheeler bin symbol, indicates that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic waste.



RoHS ✓
Compliant



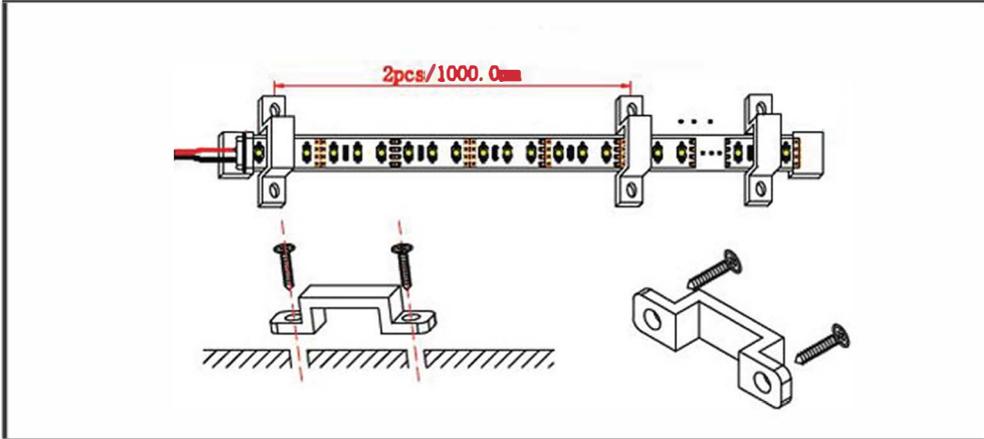

Using the rubber clips and screws that are supplied with this flexible strip, fix the strip to the desired location, as shown in the diagram above. Then connect the strip to the 15W IP44 rated driver (SE40560). Further instructions for the 15W IP44 rated driver are included in the driver pack.


ZONE

0 Inside the bath or shower.
Must be SELV (12V max.)
due to water submersion.
Minimum rating of IP67.

1 225cm above the bath or shower.
Minimum rating of IP44.

2 The area stretching to 60cm
outside the bath or shower and
60cm from water outlet of sink. An
IP rating of at least IP44 is required.

This flexible strip is IP67
rated and is suitable for
installation in zones
0, 1, 2 & the outside zones.

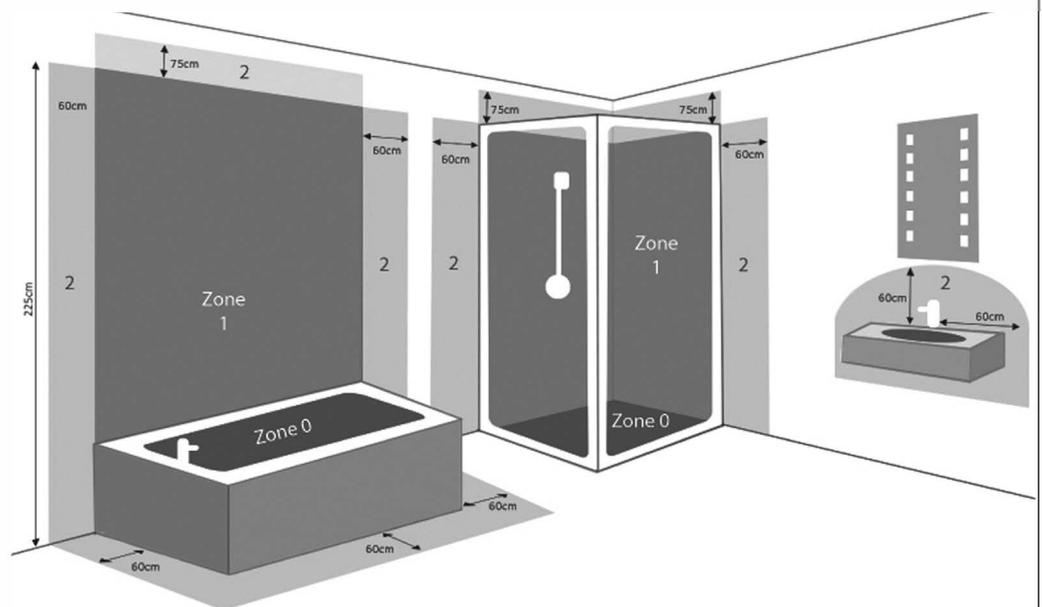

OUTSIDE ZONES. Anywhere outside zones 0, 1 & 2. Where water jets are not used for cleaning purposes, the general rules of BS7671 apply.

Maintenance & Care

- Ensure that the power is disconnected prior to cleaning.
- To keep the finish of this product, wipe over with a soft cloth periodically.
- Do not use harsh chemical solvents, this may dis-colour or damage the finish.