

AS361 - CONTROL PANEL INSTRUCTION



PUSH THE MIDDLE BUTTON TO ACTIVATE THE CONTROL PANEL.

PUSH THE SHOWER SYMBOL TO OPERATE THE OVERHEAD SHOWER.

PUSH THE WATERFALL SYMBOL TO OPERATE THE OVERHEAD WATERFALL FUNCTION.


PUSH THE HANDSET SYMBOL TO OPERATE THE SHOWER HANDSET.

PUSH THE JET SYMBOL TO OPERATE THE BODY JETS.

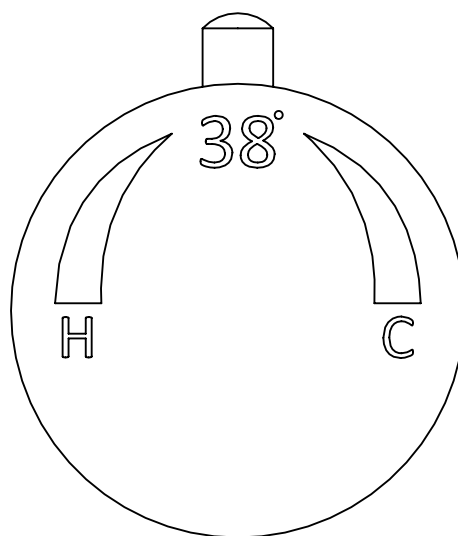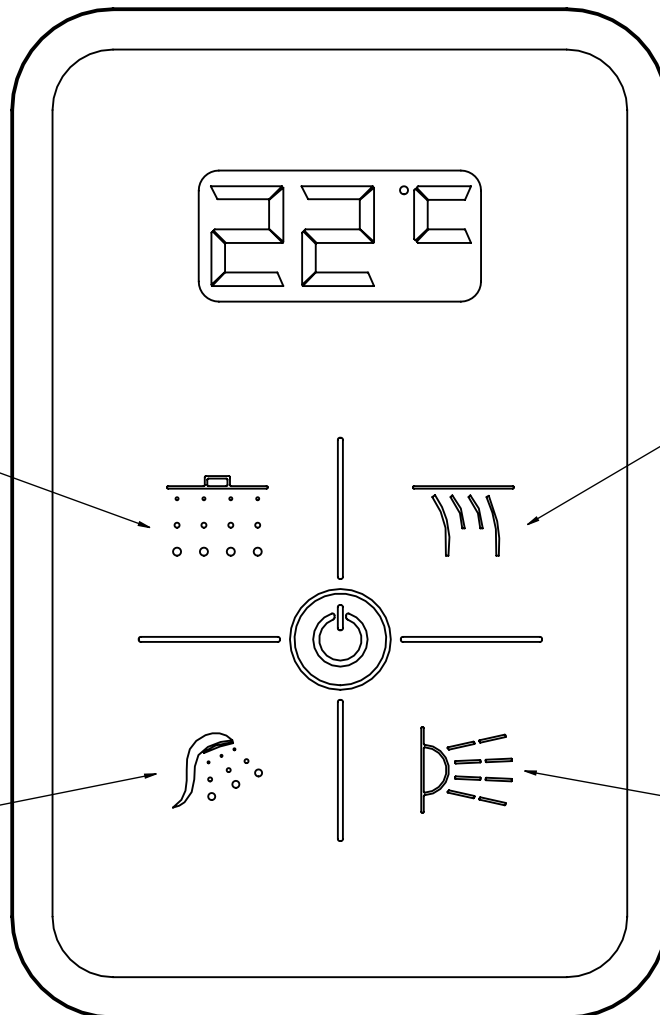


THE TEMPERATURE IS CONTROLLED BY THE HANDLE BELOW THE CONTROL PAD AS SHOWN. (ONLY IN USE WHEN WATER IS FLOWING).

1

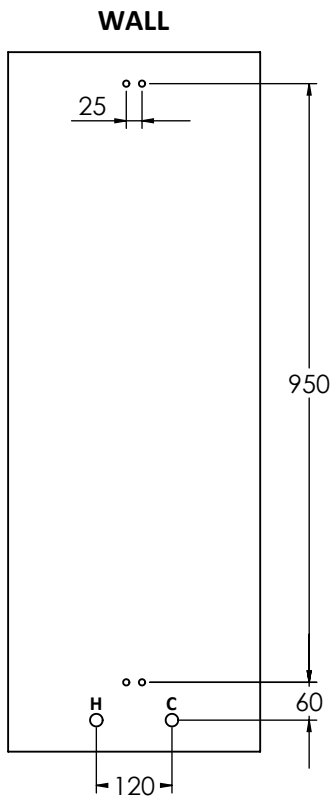


2

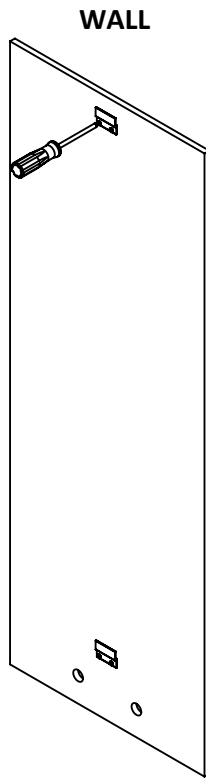

1. DRILL HOLES IN WALL AS PER STEP 1.
2. FIT THE WALL BRACKETS USING SUITABLE FIXINGS AND CONNECT THE INLET CONNECTORS.
3. FIX THE HOT & COLD INLETS AND CHECK THE CONNECTOR SEALS' FOR LEAKING. THEN HANG THE SHOWER PANEL.
4. TO REPLACE THE LIGHTS ISOLATE THE POWER SUPPLY BEFORE CHANGING. GENTLY PULL DOWN ON THE LIGHT FITTING. DISCONNECT THE LIGHT FITTING AND REPLACE.
5. A RCD (RESIDUAL CURRENT DEVICE) **MUST** BE USED WHEN INSTALLING THE SHOWER PANEL. TO ENSURE SAFE & CORRECT FITTING WE RECOMMEND THAT A QUALIFIED ELECTRICIAN CARRY OUT THIS INSTALLATION.

3

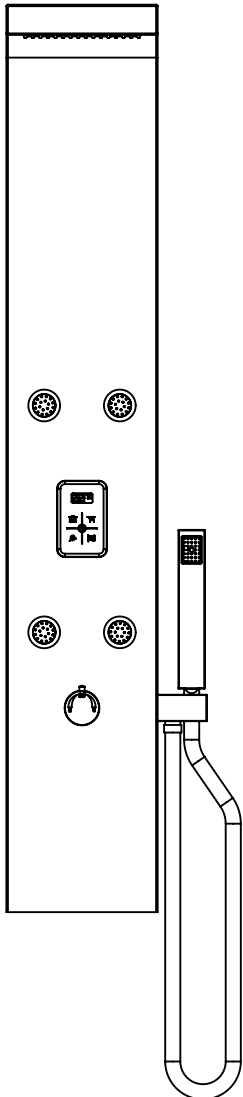

4

